
EUROPEAN PATENT · MADE IN FRANCE

GRAVILLONNI 130

Roller-mounted chip spreader · Width 1.60 m

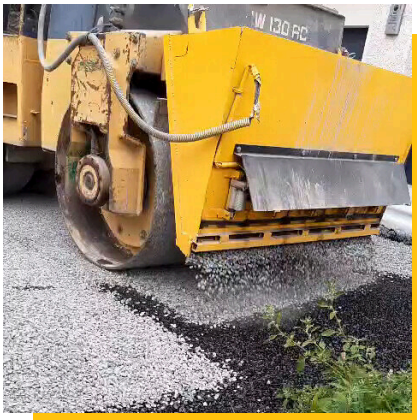

DIMENSIONS AND CAPACITY

Working (spreading) width	**1.60 m**
Usable capacity	**398 litres (0.398 m³)**
Overall length	**160 cm**
Overall height	**71 cm**
Hopper width (top / bottom)	**20 / 50 cm**
Power	**12 V, roller battery**

OVERVIEW

DESIGNED FOR THE JOB SITE

The hanging chip spreader is a spreading unit designed to fit directly on the front of a compactor (road roller). Built to make the operators' work easier, it makes every job more profitable.

MOUNTED ON THE DRUM

Two hooks and support rollers resting on the roller drum: excellent stability and precise guidance on site.

DIRECT LOADING

Its loading height lets you fill it quickly and effortlessly, straight from the tailgate of the tipper truck.

LOW PROFILE

No chippings thrown onto façades and kerbs, and easy handling for pavements and urban works.

TECHNICAL FEATURES

EASY TO OPERATE, PRECISE TO SPREAD

01 MOUNTING AND SUPPORT

- Hook mounting system
- Support rollers resting on the roller drum

02 POWER AND CONTROLS

- Self-contained pneumatic system
- 12 V mini-compressor connected to the roller's battery
- Controlled from the driver's seat
- Optional: electric or pneumatic control with instant shut-off

03 SPREADING CONTROL

- Master shut-off
- Individual selectors to close each gate independently
- Rate set by an adjustable mechanical stop, for an even spread of chippings

INFORMATION AND QUOTES
gravillonni@orange.fr

Non-contractual document. Specifications may change.